

Organic materials make up almost half of waste disposed to landfills and dumps in the Pacific. In landfills, intermingled with other waste, organic materials decompose "anaerobically", without oxygen, resulting in production of greenhouse gases and leachate entering surrounding waterways.

By diverting this material away from landfill and into a compost process, many benefits can be achieved:



Reduction of a significant volume of waste to landfills, almost doubling their life



Reduction in greenhouse gas emissions and leachate



Production of compost which can enrich soil quality and improve crop yield, increase soil water retention, and enhance food security and climate resilience for local communities

Composting mimics nature's method of decomposition, allowing organic material to break down "aerobically", with oxygen. A review of successful compost facilities in the Pacific and other Small Island Developing States, and considering climate and economic context of the Pacific, identified the following three methods of composting as appropriate for consideration in the Pacific for managing the typical "medium scale" throughput:



**Covered Bays** – this <u>Factsheet #6</u> Organic material is composted in covered bays



Windrow Composting – this factsheet
Organic material is composted in long windrows



Aerated Static Pile Composting – Factsheet #8
Organic materials is composted in large piles
aerated through perforated pipes

This factsheet is intended for decision-makers and entrepreneurs in the Pacific who seek to process approximately **1 tonne or 20 wheelbarrows/day** of organic material (a common quantity in the Pacific) at commercial, municipal, or on-farm facilities.

This publication is for considering the management of organics through the establishment of a **windrow composting facility** and provides information on recommended conditions, design features, equipment, and an overview of typical operations.

The information provided is to enable an informed decision on whether this solution is appropriate.



A windrow composting facility is an organics management solution most suited to a situation where:

- Medium quantities of organic material (more than 1 tonne or 20 wheelbarrows/day) are available and is currently being disposed, burnt, or otherwise discarded
- Approximately 450m<sup>2</sup> area of space is available (for processing 1 tonne or 20 wheelbarrows/day of input material)
- There is donor aid or investment capital available of approximately USD\$100,000 to invest into facility construction, including:
  - Construction of a large impervious hardstand area with a slope of 2-3%, facility design examples are provided in the attached design drawings
  - Procurement of machinery such as a chipper/shredder\* and mechanical equipment to turn material (i.e., a bobcat, frontend loader, or telehandler)
- Staff and resources are available for operating facility and maintaining machinery
- Windrows can be protected from rain with flexible cover or roof
- Runoff water can be collected in a leachate pond, and optional pump system to provide for runoff to be reused in the compost process
- Water supply is available, preferably collected rainwater
- Finished compost can be stored under cover (preferred)
- A use or buyers for compost have been identified
- \* The high fibrous vegetation in the Pacific requires careful selection of the type of mulch/chipper equipment to purchase. Research suggests that "drum style" chippers are better for processing this vegetation compared to disc/flywheel style chippers. Before selecting equipment, it is recommended to read operating manuals carefully and speak to suppliers and experts. If the manual only refers to wood as a suitable input or the manufacturer cannot supply evidence of the equipment managing high fibrous vegetation, further research may be required.

# **Windrow Composting System Overview**



# Organic Material Inputs



# Collection and Processing



- Vegetation and garden organics, hedge clippings, branches and small untreated wood materials, including noxious weeds
- Food organics
- Paper and cardboard
- Manure from herbivore animals (pigs, chickens, cows)
- Households and businesses separate organics for collection or delivery to compost facility
- Larger items are shredded
- Organic material added to the windrow
- Materials are turned down the windrow
- Water is added as needed
- Composting process takes 12 weeks





### **Product Outputs**





- Pasteurised and composted soil conditioners and mulches
- Potting mix

## Typical Buyers / Users

 Households, government or private sector landscaping companies, local growers






# **Process Overview**

Suitable Organic Material Inputs	<ul> <li>Food organics</li> <li>Vegetation and garden organics, lawn clippings and hedge clippings, branches and untreated wood materials, noxious weeds</li> <li>Paper and cardboard (torn or shredded)</li> <li>Manure from herbivore animals (pigs, chickens, cows)</li> <li>Biosolids / sewerage sludge*</li> <li>* Note: Biosolids can be composted in a windrow composting facility with appropriate controls t manage pathogens (see the Composting Standards), but finished compost is not recommend to bused for growing food (in gardens or crop fields). A separate organic facility may need to be established to process this material.</li> </ul>		
Unsuitable Organic Material Inputs	<ul> <li>Treated timber and other building materials</li> <li>Plastics and other household waste</li> <li>Manure from carnivore animals (dogs, cats)</li> </ul>		
Product Output	<ul> <li>Compost, for supply to households, government or private sector landscaping companies, local growers</li> <li>Fine compost can be sold as soil and potting mix</li> </ul>		
Speed	• ~12 weeks		
Difficulty	Difficult; specialist training required for equipment operation and maintenance, composting and compost monitoring		
Typical Collection Sites	Household, growers' markets, businesses, schools, community facilities		
Processing throughput	<ul> <li>Suitable scale is limited by available staff and equipment but &gt;500 kg/day recommended to justify capital investment</li> </ul>		
	Preferred scale kg/day is 10,000 kg/day or 200 wheelbarrow		
Space requirement for processing 1 tonne / day	<ul> <li>Guidance on facility size:</li> <li>1 tonne/day - 450 m² (about 1 basketball court)</li> <li>5 tonne/day - 1,500 m² (about 1 50m pool)</li> </ul>		
	<ul> <li>20 tonne/day – 6,000 m² (about 1 rugby field)</li> </ul>		
	The windrow footprint will also depend on the size and type of machinery used – i.e., the larger the bobcat / loaders, the faster the pile can be turned, increasing processing efficiencies.		
	Space is also required for:		
	Raw material blending, storage, and processing (shredding)		
	Storage and refining of finished compost		
	Traffic access and vehicle parking		
Capital Cost \$US	<ul> <li>US\$&gt;100,000 * for purchase and construction of recommended equipment and facilities (discussed on the following page); excluding site purchase and preparation</li> </ul>		
Typical operating costs US\$/tonne	US\$50-100/tonne (at preferred scale)		

Key Equipment / Requirements	Recommended Elements	Description
	Windrows	<ul> <li>Windrow width 2-6m and height 1-3m depending on equipment used</li> <li>Compost covers to cover rows during rain events or during the rainy season, preferrable covers that allow air flow but repel moisture (semi-permeable)</li> </ul>
	Other facilities	<ul> <li>Space for storage, shredding, blending, and watering of raw materials</li> <li>Capacity to add water to composting material, e.g., sprinklers, hose</li> <li>Space for covered maturation and storage of finished compost</li> <li>Space for screening and packaging of finished compost (<i>if needed</i>)</li> <li>Undercover storage for machinery, fuel and oil, and other equipment</li> </ul>
	Equipment (recommended)	<ul> <li>Shredder/chipper</li> <li>Bucket loader, such as a small front-end loader, a bobcat, a telehandler, or tractor to turn windrow</li> <li>Temperature probe</li> <li>Water supply, hose with flow regulator, sprinkler/irrigator</li> <li>Shovels</li> </ul>
	Equipment (optional)	<ul> <li>Dedicated windrow turner</li> <li>Screen</li> <li>Carbon dioxide probe</li> <li>Facility for bagging finished compost</li> </ul>
	Signage	Effective signage at compost facility to illustrate the process and requirements
	Education materials	<ul> <li>Education materials (flyers, posters) to educate households, businesses, and community facilities etc on how to separate organics correctly, and how to purchase and use locally produced compost</li> </ul>
	Staff	Staff required for collection and transport of organic items, operation of equipment, undertaking composting process
	Procedures and training	<ul> <li>Standard Operating Procedure for staff to comply with</li> <li>Training required for operating equipment, collecting material, operating compost facility, delivering awareness messages</li> </ul>

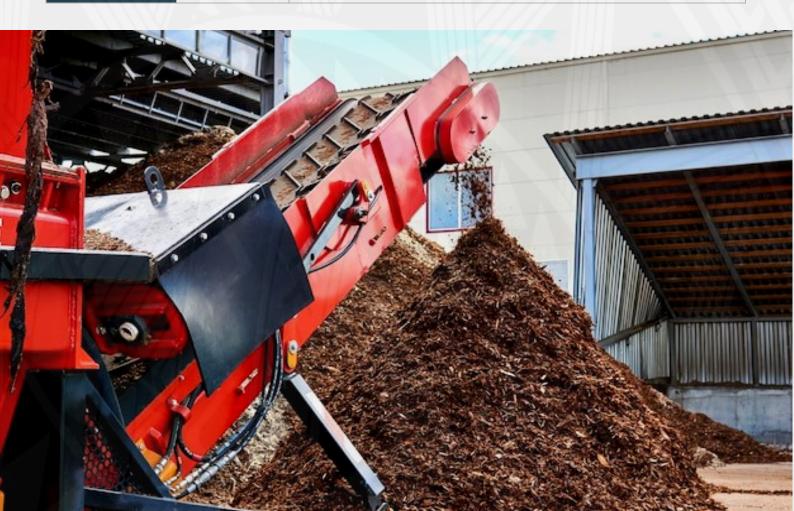


# **SWOT Analysis – Windrow Composting**

Strengths	Weaknesses	
<ul> <li>Already a familiar practice in the Pacific</li> <li>Well understood, proven technology, with extensive training materials available</li> <li>Relatively low cost (per tonne) and high capacity form of commercial scale composting</li> <li>Effectively manages risks of pathogens and plant propagules</li> <li>Biosolids can be composted in a windrow composting facility with controls to ensure pathogens are managed (note: finished compost is not recommend to be used for growing food (in gardens or crop fields). A separate organic facility may need to be established to process</li> </ul>	Shredder/chipper, and mechanical turning equipment are expensive to purchase and maintain	
Opportunities	Threats	
<ul> <li>Increases food security and climate resilience for local communities</li> <li>Scalable and easy to replicate where there are sufficient organics materials (such as on-farm at a grower co-op / association) and capital investment is available</li> <li>Could be constructed on capped landfill sites to share hardstand and drainage infrastructure</li> </ul>	<ul> <li>There may be cultural barriers to community purchasing compost</li> <li>Requires behaviour change from community to separate organic materials for collection</li> <li>Labour, transport, and operating costs mean composting facility is non-viable for amount of material available</li> <li>Processing costs not covered by product sales and no gate fee available</li> <li>Pollution of surface and groundwater due to poor design and operation</li> <li>Odour complaints due to poor process design and operation</li> <li>Equipment provided is not used, or is put to other uses</li> </ul>	


# **Indicative Design Drawing**


Editable Facility Design Drawings are provided to assist with the initial design and layout of a Windrow Compost Facility, illustrating possible site layout and recommended infrastructure for a facility processing approximately 1 tonne / day of organic material. Tailer these drawings to match the expected throughput and specific site conditions (*driveway*, *slope*, *etc*). Once tailored, these drawings may be provided to an architect or public works team to complete detailed design and costing of a proposed facility.

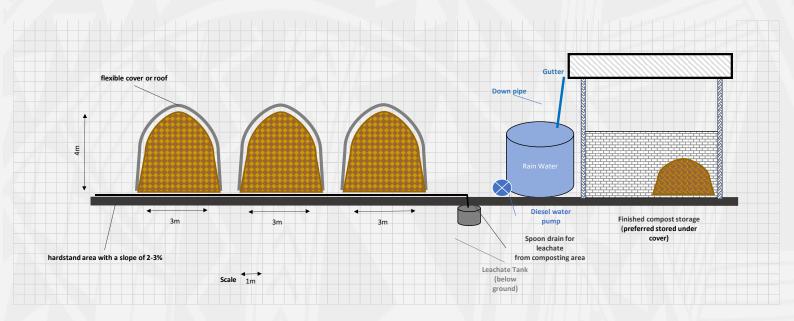


# **Operations Overview**

### **Receive and Inspect**








• Tip in sorting area, remove remaining contaminants



• Shred (or cut with a machete) materials >100mm





#### **Mix Inputs and Form Windrows**


• Windrow: H~1-3m, W~2-6m

Composting - 42-56 days

Maturation - 21-28 days








#### Screen

• To meet customer specification

#### **Product Storage**

• Undercover if possible





**Product Release** 

### **PacWastePlus Programme**

The Pacific – European Union (EU) Waste Management Programme, PacWastePlus, is a 72-month programme funded by the EU and implemented by the Secretariat of the Pacific Regional Environment Programme (SPREP) to improve regional management of waste and pollution sustainably and cost-effectively.

#### **About PacWastePlus**

The impact of waste and pollution is taking its toll on the health of communities, degrading natural ecosystems, threatening food security, impeding resilience to climate change, and adversely impacting social and economic development of countries in the region. The PacWastePlus programme will generate improved economic, social, health, and environmental benefits by enhancing existing activities and building capacity and sustainability into waste management practices for all participating countries. Countries participating in the PacWastePlus programme are: Cook Islands, Democratic Republic of Timor-Leste, Federated States of Micronesia, Fiji, Kiribati, Nauru, Niue, Palau, Papua New Guinea, Republic of Marshall Islands, Samoa, Solomon Islands, Tonga, Tuvalu, Vanuatu.

#### **KEY OBJECTIVES**

#### **Outcomes & Key Result Areas**

The overall objective of PacWastePlus is "to generate improved economic, social, health and environmental benefits arising from stronger regional economic integration and the sustainable management of natural resources and the environment".

The specific objective is "to ensure the safe and sustainable management of waste with due regard for the conservation of biodiversity, health and wellbeing of Pacific Island communities and climate change mitigation and adaptation requirements".

#### **Key Result Areas**

- Improved data collection, information sharing, and education awareness
- Policy & Regulation Policies and regulatory frameworks developed and implemented.
- Best Practices Enhanced private sector engagement and infrastructure development implemented
- Human Capacity Enhanced human capacity

#### **Our Regional Organics Project**

Organic material is biodegradable matter such as kitchen scraps (food); garden cuttings, grass and branches; and paper. Combined data from 13 waste audits in the Pacific found that approximately 40% of waste disposal to our landfills and dumps is organics. When processed correctly (in an "aerobic" or oxygen-filled environment), organic materials can produce valuable nutrient rich products, such as compost, suitable for soil enhancement and food cultivation. However, when intermingled with other waste and disposed in a landfill or dump (an "anaerobic" environment), organic material can release toxic leachate and generate methane gas.

The purpose of this regional project is for Pacific stakeholders, now and into the future, to have practical and resources and decision-support needed to design and implement their own effective organics management solutions, appropriate for their own context and communities. Fiji, FSM, RMI, and the Solomon Islands have chosen organics as a priority or secondary priority of their PacWastePlus country project. The Organics regional project will review existing Organic facilities from the region, undertake technical research, and adopt findings and resources from Country Projects to develop:

- a "Minimum Standard" technical framework for countries to have as a resource when designing and operating their own organics processing facility
- a "decision guidance resource/tool" to guide informed decision making around processing system design/technologies, size and equipment requirements, operational processes, etc to suit any context and scale
- on-line training package to guide the application of "decision guidance resource/tool"
- resources to communicate with and empower communities to convert their organic "waste" to a valuable "resource" using appropriate solutions available (i.e., backyard, on-farm, community-level, or national-level organics processing).

Learn more about our regional organics management programme by visiting

https://pacwasteplus.org/regional-project/organics-management/

For more information please contact:



The PacWastePlus team on <a href="mailto:pwp@sprep.org">pwp@sprep.org</a>









This publication was produced with the financial support of the European Union. Its contents are the sole responsibility of SPREP and do not necessarily reflect the views of the European Union.

